



## Fan Kit LFBL3642 for LF and D Series Fireplaces



# WARNING

**RISK OF FIRE AND ELECTRICAL SHOCK!**

**TURN OFF THE GAS AND ELECTRICAL POWER BEFORE INSTALLING BLOWER!**

When installed, make sure to contain any excess wire of the cord set;  
Preventing it from making contact with moving or hot objects.

Drywall dust or other fragments may be present in your fireplace's vent space, clean this area before you install the blower kit. Any bearing or motor damage resulting from this condition is not covered by the warranty policy.

This Blower Kit is tested and safe when installed in accordance with these installation instructions. It is your responsibility to read all instructions and consult the Owner's Installation Manual for your particular model number for Supplemental Information before starting installation. Blower operates on 120V/60Hz power.


### Blower Kit Parts

Check the contents of the carton.  
Make sure nothing was damaged in shipment.  
Do NOT install a damaged blower kit!

Description	Qty.
Fan - 3 Motor System	1
Power Cord Harness	1
ON/OFF Rocker Switch	1
3-Prong to 2-Prong Adapter	1
Hardware	1
Installation Instructions (Downloadable)	1

**Step 1:** Turn Off Fireplace and allow it to cool down. Disconnect from 120V Power. Shut off the Gas supply. (If applicable)


**Step 2:** Remove the lower vent louver/grill. This provides access to the lower vent space below the firebox. (Figure: 1)

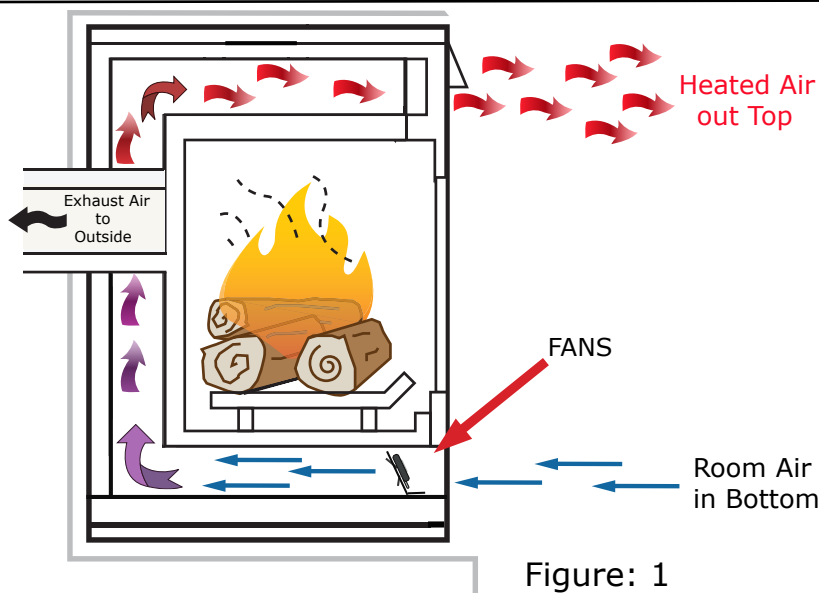

**Step 3:** Place the fan assembly with the blades pointing towards the rear of the fireplace. (Figure: 1 & 2)

Using 2 screws provided, fasten the bottom lip of fan to the floor pan (There should be 2 existing holes). The fan assembly may be pushed toward the back of the vent space, use then the magnets to hold fan assembly in place.(Figures: 1 & 2)

**NOTE:** Keep wire assembly away from the fan blades.

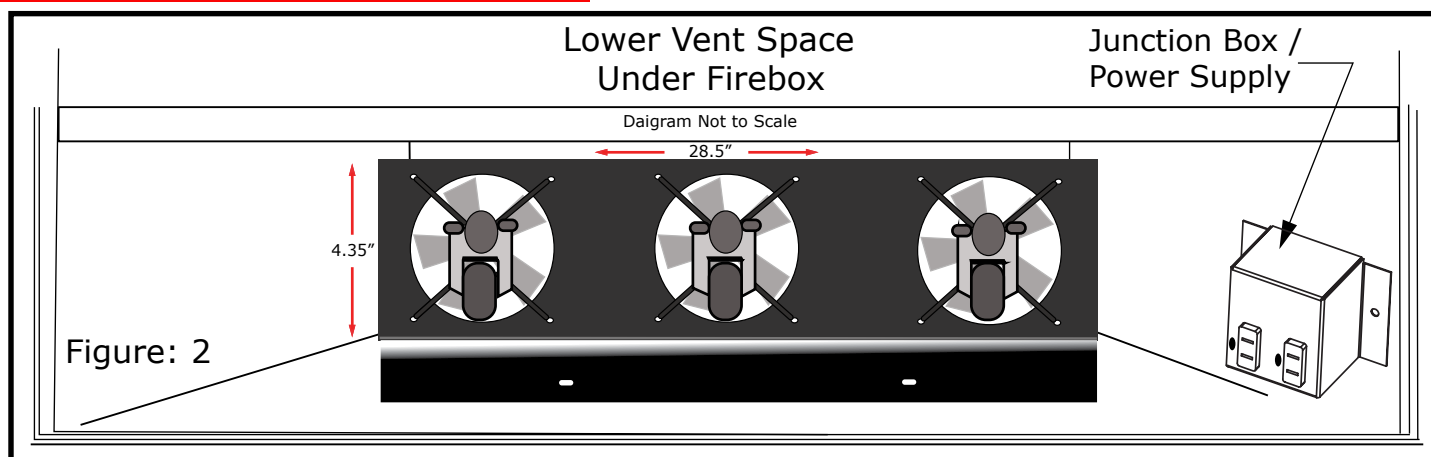



Step 4: Remove the 2 connecting wires from the ON/OFF rocker switch located on the wiring harness. (Figure: 3)

Insert the rocker switch into the lower louver panel with the switch lever pointing outward.

Reconnect the previously removed wire connectors onto the switch terminals.

Insert the supply plug into one of the available power receptacles at the right side of the compartment. (Figure: 2)

Step 4: 1. Reinstall the louver panel into the framed opening with the louvers pointing upward.

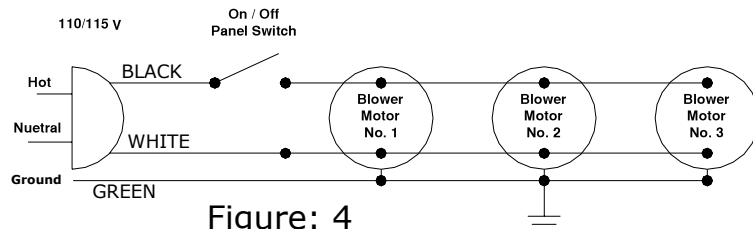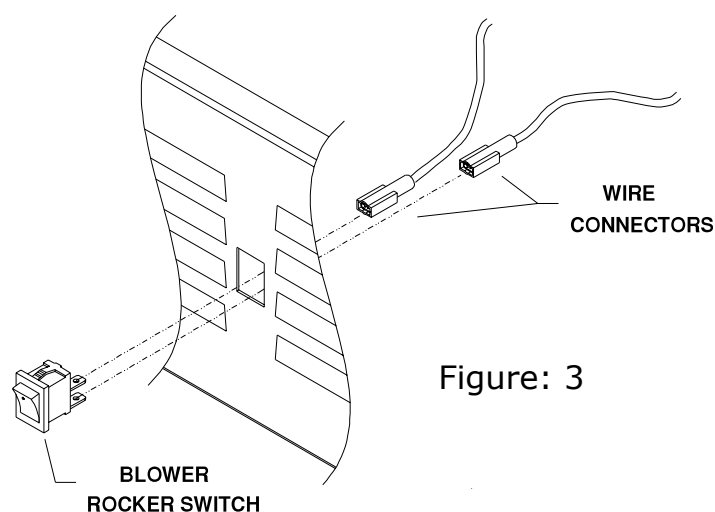

My Fireplace Blower LLC produces and sells aftermarket fireplace blower kits; which require consultation of an Owner's Installation Manual from the Manufacturer of a particular fireplace model number for installation. During Installation of a fireplace blower kit or replacement blower, refer to the Owner's Installation Manual for your particular fireplace model to obtain supplemental information. My Fireplace Blower LLC is not responsible for any damage incurred during installation or resulting from installation of a fireplace blower kit, which was directed and/or conducted from the information within this document.

Installations in Canada must conform to the current CAN/CGAB-419.1 and .2 Gas Installation Code and local regulations. When installing the blower fan kit, it must be electrically grounded in accordance with CSA C22.1 Canadian Electrical Code Part 1 and/or Local Codes.

Installations in the USA must conform to local codes, or in absence of local codes or the National Fuel Gas Code, ANSI Z223.1-1988. When installing the blower fan kit, it must be grounded in accordance with local codes, or in absence of local codes, with the National Electrical Code, ANSI/NFPA 70-1987.