

Installation Videos: CLICK

Installation Instructions: CLICK

MyFireplaceBlower.com: CLICK

High Quality Aftermarket Fireplace Blowers & Fans

1-800-466-4045

## Instructions for Design Version - WFK42 Blower Kit



**RISK OF FIRE AND ELECTRICAL SHOCK!** 

TURN OFF THE GAS AND ELECTRICAL POWER BEFORE INSTALLING BLOWER!

When installed, make sure to contain any excess wire of the cord set; Preventing it from making contact with moving or hot objects.

Drywall dust or other fragments may be present in your fireplace's vent space, clean this area before you install the blower kit. Any bearing or motor damage resulting from this condition is not covered by the warranty policy.

This Blower Kit is tested and safe when installed in accordance with these installation instructions. It is your responsibility to read all instructions and consult the Owner's Installation Manual for your particular model number for Supplemental Information before starting installation. Blower operates on 120V/60Hz power.

## Blower Kit Parts


Check the contents of the carton. Make sure nothing was damaged in shipment. Do NOT install a damaged blower kit!

Description	Qty.
Fan	1
Variable Speed Control with Power Cord	1
Mounting Brackets	2
Hardware	1
Installation Instructions (Downloadable)	1

Step 1: Let fireplace cool down.

Attach mounting brackets with 2 screws to each end of base bar.

Figure: 1

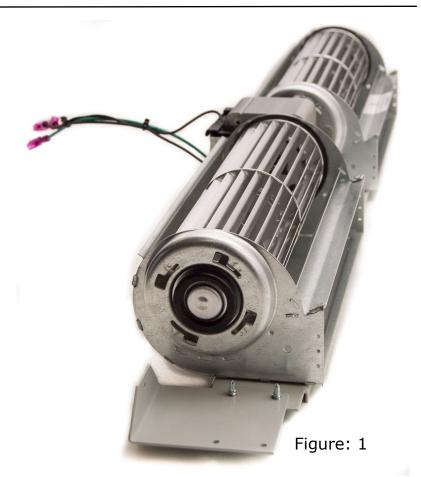



Installation Videos: CLICK


Installation Instructions: CLICK

## MyFireplaceBlower.com: CLICK

Step 2: Connect the white & black wires of power cord to either of black wires coming from motor, connect green wire from power cord to green wire on motor. Place the blower inside the lower vent space below the firebox on the floorpan. There are 2 basepan brackets coming up from the floorpan aprox. 25 inches apart, put the blower with the mounting brackets directly infront of the basepan brackets. Secure the basepan brackets to mounting brackets on each side of fan with the screws provided. (Figure: 2)

The variable speed control decreases speed as it is turned to the right and turns off when turned to the left.

To mount variable speed control to front louver panel/bracket, remove knob & use 11/16 wrench to turn lock nut.

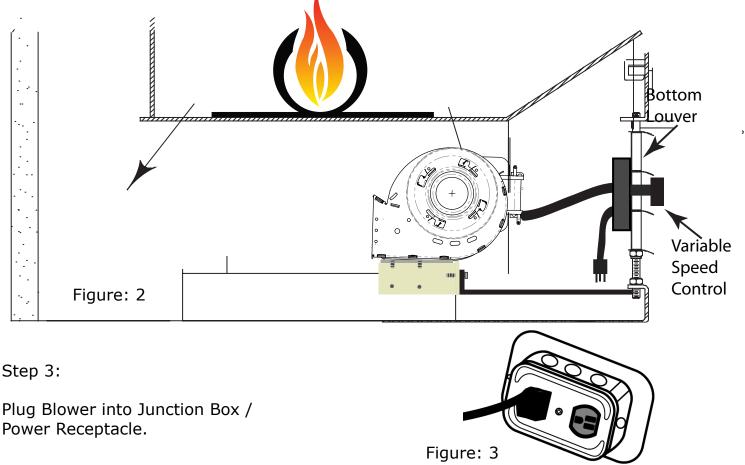

My Fireplace Blower LLC produces and sells aftermarket fireplace blower kits; which require consultation of an Owner's Installation Manual from the Manufacturer of a particular fireplace model number for installation. During Installation of a fireplace blower kit or replacement blower, refer to the Owner's Installation Manual for your particular fireplace model to obtain supplemental information. My Fireplace Blower LLC is not responsible for any damage incurred during installation or resulting from installation of a fireplace blower kit, which was directed and/or conducted from the information within this document.

Installations in Canada must conform to the current CAN/CGAB-419.1 and .2 Gas Installation Code and local regulations. When installing the blower fan kit, it must be electrically grounded in accordance with CSA C22.1 Canadian Electrical Code Part 1 and/or Local Codes.

Installations in the USA must conform to local codes, or in absence of local codes or the National Fuel Gas Code, ANSI Z223.1-1988. When installing the blower fan kit, it must be grounded in accordance with local codes, or in absence of local codes, with the National Electrical Code, ANSI/NFPA 70-1987.